COBRA SECURITY SYSTEMS LTD

BURGLAR ALARMS • VEHICLE ALARMS • DOOR ENTRY SYSTEMS

DOOR & WINDOW LOCKS • INTERCOMS • CCTV • SAFES

FIRE EXTINGUISHERS, ALARMS AND BLANKETS • INSTALLED OR D.I.Y.



Thatcham

SUPLIED AND FITTED DOOR ENTRY SYSTEMS

NS/	who	ata
- 3	V	V
	UNAS	LEAS
5010	UKAS	LI KA


WIRED SYSTEMS

CCL-A1/CK Narrow style 1-way Audio System with one Handset, 1 Outdoor Panel, (2 wire) 1 Power Supply Additional handsets if required	£250.00 £ 95.00
CCL-V1/CK Narrow style 1-way Mono Video System with one Monitor/Handset, 1 Outdoor Panel, (4 wire) 1 Power Supply Additional Monitor/handsets if required	£350.00 £225.00
DOOR KNOX narrow style 1-way Colour Video System with 7" Hands free touch screen, 1 Outdoor Panel, (4 wire) Additional outdoor panel if required Additional Monitor/handsets if required	£445.00 £145.00 £295.00
WIRE FREE SYSTEMS ABUS TVAC 80020B Wire free Colour Video System With 3.5" Monitor incorporating recording/memory facility Using SD card, hands free operation, wireless outdoor station With 5 metre Infra Red night vision.	£545.00
DAITEM SC901AU (Wireless) one way Audio System with one Handset, 1 Outdoor Panel, (Mains Powered) DAITEM SC906AU1 (Mains free system)	£545.00 £675.00
DAITEM SC902AU (Wireless) Audio System (With RKP & Prox with one Handset, 1 Outdoor Panel, (Mains Powered) DAITEM SC909AU2 (Mains free system) Additional Handsets if required	Reader) £650.00 £725.00 £295.00

Page 1 of 2





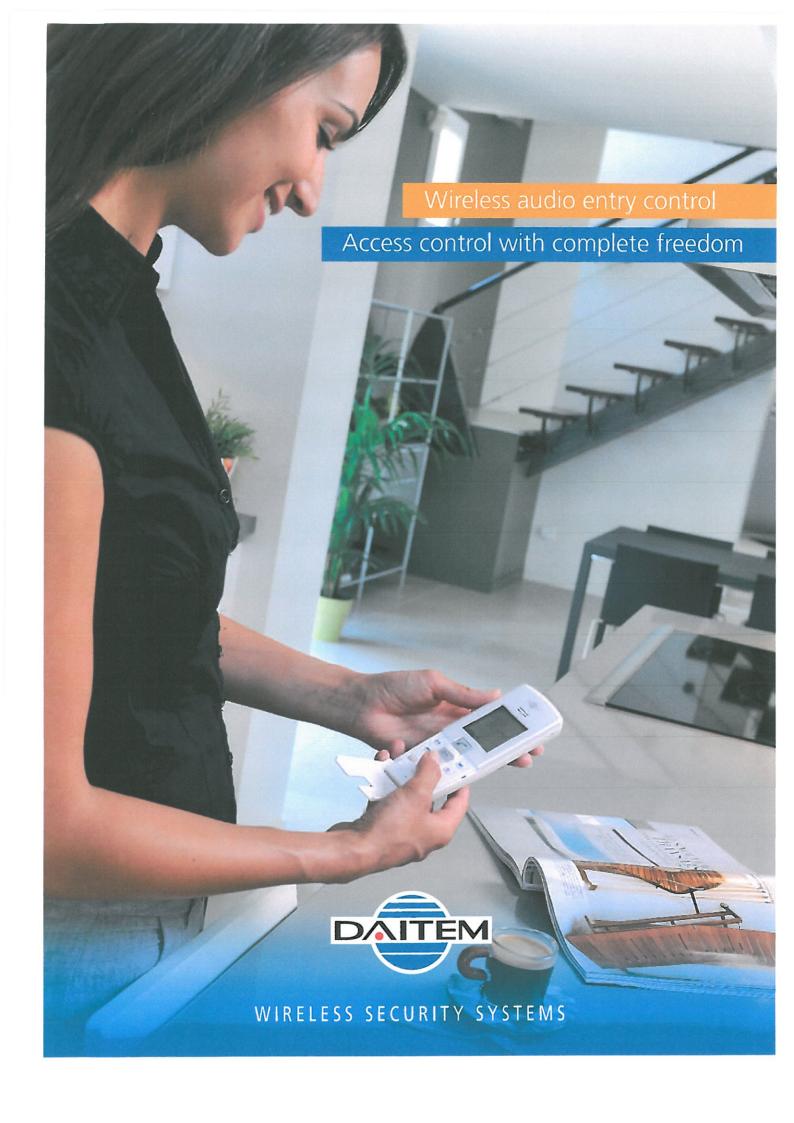

Wireless audio entry control

Access control with complete freedom

A flexible solution for users requiring convenience of mobility and ease of use. Wireless equipment designed for residence and office, and particulary adaptable to existing buildings.

An advanced access control

Multi-applications, the wireless intercom facilitates the filtering of visitors, remote listening & 2-way speech, remote operation of electric locks, operation of automatic gates & barriers, garage doors, and lighting (up to 16 remote operations*).

Perfect freedom of movement and control

- The wireless handset provides digital communication full duplex (hands free or off-hook), performing equally well outside as well as inside. Handsets also have direct inter-handset intercom capabilitie.
- At the external call point users can control access via proximity cards or an optional integrated keypad.

Optimised security : The handset LCD screen

- indicates the status of the entrance (opened or closed),
- information feedback and scrolling text.

Installation and programming reduced to the minimum


- No cable to be installed between the handsets and the entrances (driveway gate, pedestrian gates, garage doors, or lighting).
- No civil engineering needed. No the trenching outside or running cables inside: the anti-vandal call point is slim fitting surface mount so does not require rebating into the wall or gate post.
- The reversible base of the handset charging base allows table top or wall mounting. The call points can manage 1 or 2 residences or offices. The control box and the handset are equipped with concealed integrated antenna.
- For ease of parameter setting, the handset is provided with 6 buttons and a navigator button covered by a hinged flap, and scrolling menus on the LCD screen.

Built-in options to personalise and expand the system

- For improved ease of use, many functions are programmable: The call point is backlit, text names can be entered to identify up to 4 entrances.
- A very simple management of the badges, PIN codes and ring tones.
- Option to identify entrances by individual ring tones.
- · Multilingual handset.
- · Handset belt clips.
- It is possible to add there additional handsets compounds and entry call points (up to 4 handsets per call point).

*Nécessitent des récepteurs associés.

Handset with battery powered recharging base



Handset with mains powered recharging base



Handset with hinged cover open



Anti-vandal keypad call point with prox badge



Handset with mains powered charging base,



AUDIO AND VIDEO ENTRY SYSTEMS

Mono Video Entry

CCL-V1-CK

- Narrow style panels
- · Die cast metal material
- · High quality handset
- · Improved longer distance
- Keypad access option
- Up to 3 handsets
- Up to 2 entrances
- · Surface mount

OPTIONS

CCL-R1

· Timer Relay Module









AUDIO AND VIDEO ENTRY SYSTEMS

Audio Entry Kit

CCL-A1

- · Narrow style panel
- Metal panel
- Up to 3 handsets
- · Simple wiring









Wireless Video Door Intercom

Art. no. TVAC80020B Page 1 of 1



- · Wireless video door intercom including camera and monitor
- · Door station for a sheltered outdoor area (IP55)
- IR camera for day/night operation with 640 x 480 VGA resolution
- · Uses existing cables (doorbell, door opener)
- · Portable 3.5" TFT monitor
- Doorbell starts live screen and recording (to SD card)
- · Pressing the button on the monitor switches the door opener
- · Audio function for intercom
- · Digitally encrypted audio and video transmission

This practical video intercom consists of a door station including a video camera and a 3.5" monitor, both connected wirelessly with each other.

Security and privacy for your home

This intercom is a simple solution for making your front door safer. You see who is at the door, can speak with the person, and can operate the electric door opener if required. This spares you unpleasant surprises and unwanted guests.

Operation in three easy steps

Pressing the doorbell activates the portable monitor (live screen and recording) You can view the video image on the monitor; the intercom can be used You can switch the door opener by pressing a button on the monitor Easy installation, ideal for retrofitting

The door station is mounted in a protected outdoor area (protection class IP55) and can be connected to existing cables (doorbell, door opener). This makes the door station optimal for retrofitting existing buildings. The monitor operates on batteries and can be used accordingly on a mobile basis.

Complete scope of delivery

In addition to the door station and monitor, the scope of delivery includes everything you need for retrofitting a house or apartment. Including power supply units, cable lug, round socket, screws, wall plugs, and screwdriver.



A range of power supply and call point options:

- Control box and call point powered by mains, lithium power pack, or solar panel, all with rechargeable battery back-up.
- Handsets with built-in rechargeable batteries, recharged via mains powered or lithium power pack bases.
- Call points with built-in badge readers, and with or without keypad.

Optwin® technology, guaranteed safety and performance

The Optwin® technology is based on bi-directional dual channel radio transmission to ensure guaranteed secure reception, it offers an evolutionary solution, powerful and simple to implement.



- Bi-channel radio: inter-equipment communication via two frequencies in 868MHz band, and audio communication via a frequency automatically selected amongst four in the 863MHz high flow band.
- Bidirectional radio transmission with auto-selection of the most favourable channel, for optimal high fidelity 2-way speech.
- Secure radio transmission, using encoding of the messages based on the use of a rolling code and a key exchanged between transmitter and receiver.

■ Up to 5 years of battery life

- The handset and the control box are supplied with the choices by mains power or lithium battery power pack, offering up to 5 years of battery life according to the conditions of use.
- A rechargeable battery fitted in the handset, provides up to 15 days of power when off its charging base.



Daitem guarantees, up to 3 years warranty

Daitem provides a guarantee for parts and labour of 2 years. This guarantee can be extended to 3 years on the majority of the products upon return and registration of the certificate of guarantee, according to Daitem conditions.



Wall mounted handset with lithium battery power pack base (mains not required)



Control box



Single dwelling call point with anti-vandal cover and integrated keypad



Handset with cover open




VIDEO DOOR ENTRY KIT

VDP500





Attractive 7" touch screen video door entry system with hands free intercom

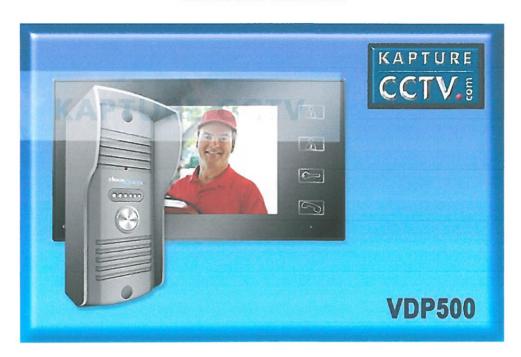

Features

- ✓ Slimline 7" LCD Display
- Dual Input Design
- ✓ Up to 4 Video Monitors
- √ 2 Way Handsfree Intercom
- ✓ Colour Camera Doorbell Unit
- √ Touch Screen Doorlock Release

Description

Low cost video door phone that looks far more expensive than it actually is. Handy built in relay can be used to operate electronic door releases.

The monitor has a 7" touch screen monitor with controls for unlocking the door, talkback, and select door 1 or door 2. There are also controls for brightness, contrast and volume. You can also select up to 16 different melodies and control the volume.

The camera unit can be connected up to 4 monitor units with each monitor having up to 2 camera units attached.

Note - the outside unit needs to be in a semi-sheltered location.

Disclaimer

Printed: 20/01/2012 Page 1


FITTED ENTRYPHONE & ACCESS SYSTEMS

Standard Electric lock release	£ 99.95
Mini Mag Lock	£249.00
Z+L Bracket for mini mag lock	£ 69.95
Internal Digital Keypad	£195.00
External Prox/digital keypad combined	£299.00
VXS-10 Stand alone Prox reader (Max 300 tags) Prox tags for the above (each)	£399.00 £ 2.99
12V Power Supply	£ 79.95





Dimension



.....

Features

- Slim type keypad design
- Memory volume up to 1000+10 proximity cards/tokens and PINs with the programming time up to 0.5 second.
- M Access modes:
 - a. Only Proximity Card (default setting)
 - b. PIN or Proximity Card
 - c. PIN + Proximity Card
- **▼** Logical memory prevents duplicated card setting.
- M Controller with keypad sound to avoid incorrect key-in
- Additional input for anti-tailgating function to ensure high security access control.
- M Built-in tamper switch.
- Dual relays to control door lock and other security devices.
- Aluminum alloy casing designed with vandal resistant screws for enhanced safety and durability.
- M Epoxy sealed for waterproof grade IP65.

Specifications

- Operating Voltage:12VDC
- Current Draw:Holding:30mA@12VDC
 - Pull In: 60mA @12VDC
- RF Frequency: EM 125KHz
- Read Range: 5cm (In noise-free environment)
- Keypad:Backlit 12-digit (0~9,*,#)
- Input: 2 contacts for Request-To-Exit button, 1 contact for door reed switch
- Output: 2 relays(Dry contacts: N.O./N.C./Com.)
- LED Status Indication: 2 LED indicators (Red/Green)
- Memory Volume: 1000+10 proximity cards/tokens + PINs
- Relay Électric Current: Max. 2A@30VDC, 0.6A@120VAC Relay Strike Time: 01~99 seconds or Toggle Mode (00)
- Ambient Humidity: 5%~95% (Non-condensing)
- Operating Temperature:-20 C~70 C

Statement

The DG-160 is a dual relay digital code-operated for access control keypad with up to 1000+10 individual user PINs. Controller with backlit keypad and beep sound to avoid incorrect key-in. Epoxy sealed for waterproof grade IP65. Aluminum alloy casing designed with vandal resistant screws for enhanced safety and durability. Additional input to cut off time delay for auto-relocking and anti-tailgating function.

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.

GIANNI INDUSTRIES, INC.

No. 13, Zhong Sing Road, Tu-Cheng Industrial Zone, Tu-Cheng City, Taipei, Taiwan 23678
Tel: 886-2 2267 7986 / Fax: 886-2 2267 9876
E-Mail: info@gianni.com.tw
Website: gianni.tw
Copyright 2009 Gianni Industries, inc. All rights reserved.
DM-CA-DG-160 Ver. A Published on 2009.12.24







The products are manufactured under ISO 9001 & IECQ QC 080000 Certified Quality Management Program environment back its product quality, performance and commitment to customer satisfaction.

ACCESS CONTROL SYSTEMS

Combined Keypad/Proximity

DG-800

Vandal resistant

· Die-cast Aluminium

• Operating voltage: 12 or 24 Vac or Vdc

• Programmable 5 digit code

• Frequency: EM 125Khz

• Read range 5cm (In noise-free environment)

12 Digit backlit keypad (0-9,*,#)


Output: 2 Relays COM / NO / NC
1000+10 Proximity cards, tokens and PIN's

 Strike time: 1 to 99 seconds or toggle mode

• Operating temperature -20°C to 70°C

• 2 LED indicators • green • red



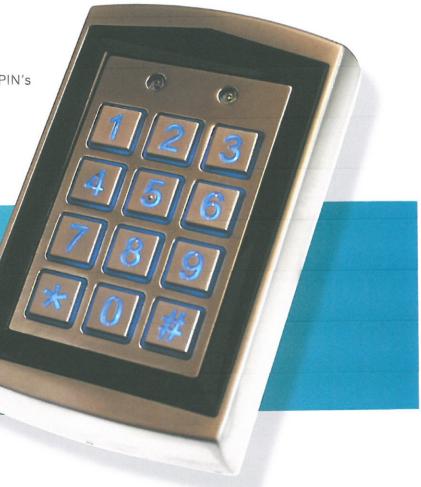

All dimensions in mm



